OROFLEX 10

OROFLEX

CHARACTERISTICS

Colour: Black.
Composition: Synthetic rubber and Polyester-Polyamide textile.
Surface: Ribbed for maximum abrasion resistance.
Service Temperature: -20 º'baC to + 80 º'baC
Standard Length: 30-60 m (up to 200 m to order).
High abrasion resistance.

APLICATIONS

- Sewage pumps
- Drainage pumps
- Transfers
- Drainage
- Irrigation installations
- Pumping of sludge and liquid fertilizers
- Temporary installations (by-passes)
- Cable and sling protection covers
- Irrigation guns

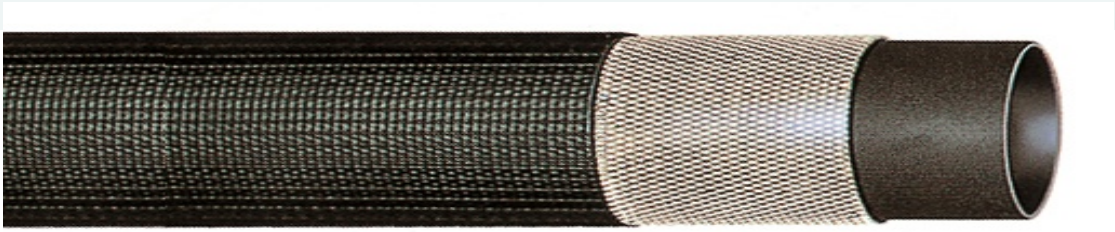

Code	Nominal Diameter		Wall thickness	Weight per meter	Service/burst pressure	Tensile strength	Radius of curvature
	mm	**inches**	**mm**	**grams**	**bar**	**Kg**	**m**
01100	**30**	1 1/4	2	270	10 / 30	700	0,500
01101	**38**	1 1/2	2	310	10 / 30	900	0,700
01102	**45**	1 3/4	2	370	10 / 30	1.200	0,900
01103	**52**	2	2	450	10 / 30	1.300	1,100
01104	**60**	2 1/4	2	500	10 / 30	1.400	1,200
01105	**65**	2 1/2	2	620	10 / 30	1.400	1,300
01106	**70**	2 3/4	2,5	650	10 / 30	1.700	1,350
01107	**76**	3	2,5	680	10 / 30	1.800	1,450
01108	**80**	3 1/4	2,5	700	10 / 30	1.850	1,450
01109	**90**	3 1/2	2,5	830	10 / 30	2.100	1,480
01110	**102**	4	2,5	950	10 / 30	2.400	1,700
01111	**110**	-	3	1.100	10 / 30	4.000	1,800
*01112	**115**	4 1/2	3	1.200	10 / 30	4.100	1.900
01113	**127**	5	3	1.450	10 / 30	4.200	2,100
01114	**152**	6	3	1.650	10 / 30	5.000	2,250
01115	**204**	8	3	2.250	10 / 30	6.600	3,000
01116	**254**	10	3,5	2.800	8 / 24	8.800	3,300
*01117	**306**	12	4	3250	8 / 24	10.200	3.600

* To order